




Your XLR Tow mirror is designed to fit most vehicles. It incorporates unique and patent pending designs that make it one of the best clip on mirrors you can buy.

The XLR is designed to fit passenger and driver side mirrors. The XLR ratchet adjusters can be removed and reversed when installing the mirror on opposite sides of your vehicle. Always install ratchet adjuster with adjustable rubber strap attached to the lower mirror arm assembly (8).




The XLR Tow Mirror is designed to fit vehicle mirrors that have a gap between mirror glass and mirror head frame (1) (5) (7) as well as vehicle mirrors that are flush and have no such gap (3) (6).

When using on a mirror without gap simply pull quick connect attachment until opposite end is flush with arm assembly (2) (3).

When using on a mirror head with gap or lip push quick connect attachment until opposite end has 1/2" gap. (1) (5) (7).

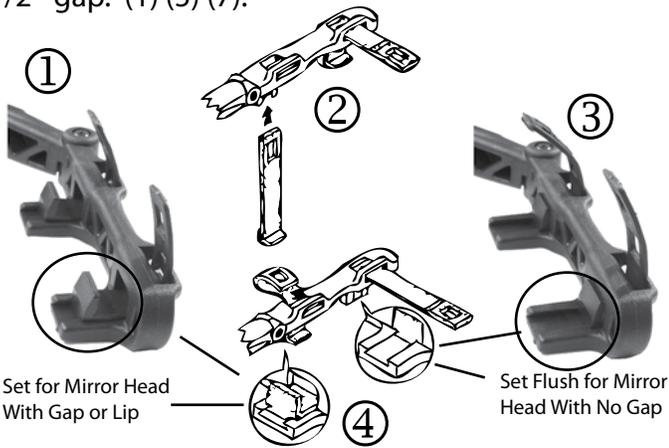

Once you have determined the vehicle mirror type attach XLR ratchet adjusters to upper and lower ratchet quick connectors (8) (9).

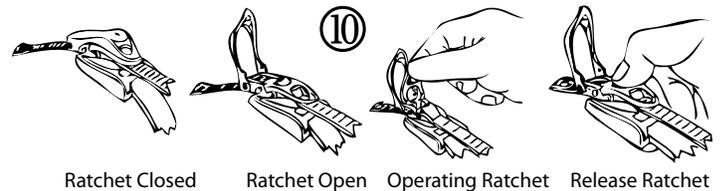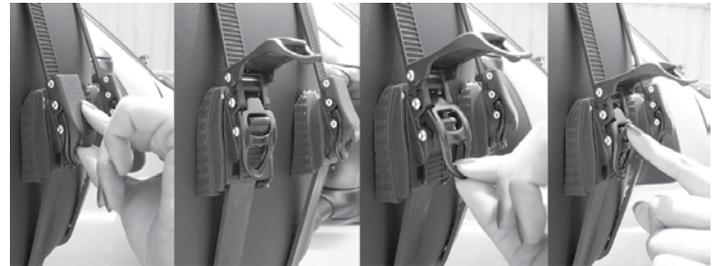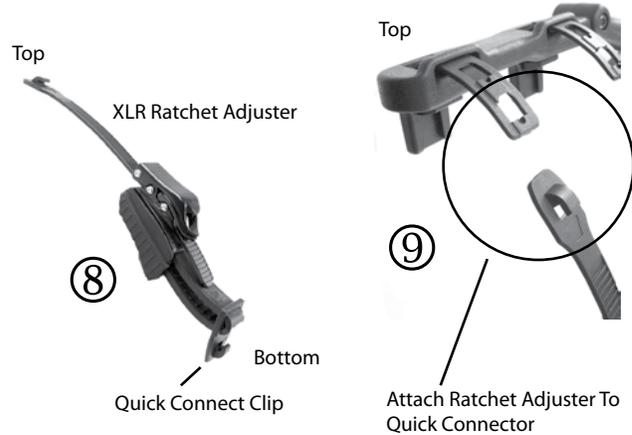

Open cover on ratchet and push button to release the ratchet strap enough to fit XLR Tow Mirror on to existing mirror. Operate ratchet adjuster until snug (10). On larger vehicles additional strap length may be required. The rubber strap on the XLR ratchet adjuster can be adjusted by sliding the quick connect clip lower on the rubber strap (8).

Position XLR Clip On Mirror onto your vehicle mirror.



Periodically check that mirror is securely attached. Because of universal fit design of this mirror the purchaser must determine suitability of this mirror to their particular vehicle.

**PRIME PRODUCTS**  
**PARAMOUNT, CA 90723**  
**www.prime-products.com**